

DM01

Battery Powered Precision Digital Gauge

Stainless Steel Sensor

class 0.05

Nominal pressure

from 0 ... 100 mbar up to 0 ... 400 bar

Special characteristics

- ▶ modular sensor concept
- ▶ data logger
- ▶ graphic display
- ▶ stainless steel housing Ø 100 mm
- ▶ communication interface USB 2.0

Optional

- ▶ accredited calibration certificate
- ▶ IS-version zone 1
- ▶ software incl. USB converter
- ▶ service case with accessories

Functions

- ▶ zero point calibration
- ▶ data logger
- ▶ turn off automatic
- ▶ configurable switch-off automatic
- ▶ background illumination

The digital pressure gauge DM01 is a precision device fulfilling highest demands. It was conceived especially for the process monitoring and calibration. The advantage: With the digital display DM01, different pressure transmitters can be used for various measurement ranges.

The pressure transmitter can be selected and easily exchanged for the required pressure range on site – without tools or parameter setting.

Outstanding measuring qualities, an intuitive operation, as well as an innovative, modular sensor concept characterise the DM01. The battery-powered digital pressure gauge can be used e.g. for controlling pressure courses or calibrating pressure transmitters.

The integrated data logger is able to record pressure and temperature values linearly and cyclically which can be analysed with software BD|LOG.

Preferred areas of use are



Calibrating techniques



Laboratory applications





Plant and Machine Engineering











Input pressure												
Nominal pressure gauge / abs.	[bar]	-1...0	0.10	0.16	0.25	0.40	0.60	1	1.6	2.5	4	6
Overpressure	[bar]	5	1	1	1	2	5	5	10	10	17.5	35
Burst pressure \geq	[bar]	7.5	1.5	1.5	1.5	3	7.5	7.5	15	15	25	50
Nominal pressure gauge / abs.	[bar]	10	16	25	40	60	100	160	250	400		
Overpressure	[bar]	35	80	80	105	210	600	600	1000	1000		
Burst pressure \geq	[bar]	50	120	120	210	420	1000	1000	1250	1250		
Vacuum resistance		$P_N \geq 1$ bar: unlimited vacuum resistant $P_N < 1$ bar: on request										
Performance												
Accuracy ¹		standard for $P_N \geq 0.4$ bar: $\leq \pm 0.05$ % BFSL standard for $P_N < 0.4$ bar: $\leq \pm 0.125$ % BFSL										
Long term stability		$\leq \pm 0.1$ % FSO / year at reference conditions										
Measuring rate / Display		1 or 2 measurements per second										
¹ accuracy according to IEC 60770 – minimum value setting (non-linearity, hysteresis, repeatability)												
Thermal effects (Offset and Span)												
Temperature error		for nominal pressure ranges $P_N \leq 160$ bar: included in the accuracy information for nominal pressure ranges $P_N > 160$ bar: tolerance band $\leq \pm 0.75$ % FSO (is valid for compensated range 0 ... 50 °C)										
Permissible temperatures												
Permissible temperatures		medium: -10 ... 55 °C environment: -10 ... 55 °C storage: -20 ... 70 °C										
Materials												
Pressure port / housing		stainless steel 1.4404 (316L)										
Display housing		stainless steel 1.4301 (304)										
Seals (media wetted)		FKM, without (welded version)										
Diaphragm		Stainless steel 1.4435 (316L)										
Media wetted parts		pressure port, seal, diaphragm										
Explosion protection												
AX16-DM01		IBExU12ATEX1108 X zone 1: II 2G Ex ia IIC T4 Gb										
Miscellaneous												
Display		graphic LC display: visible area 55 x 46 mm; (resolution 128x64) figure height 5.5 mm (displaying of pressure value) measured value display: max. 7 digits, depending on pressure range temperature display, time, 100-segment-bargraph, potential input value background illumination: illumination period and intensity adjustable										
Temperature display range		accuracy: ± 2 K resolution: 0,1 K display: -10 ... 55 °C										
Data logger		recording pressure values and sensor temperature (min, hrs, daily at a defined time) max. 8500 values modes: cyclic, linear measuring value interval adjustable										
Current consumption		without background illumination: approx. 1,3 mA with background illumination: approx. 16 mA (depending on adjusted intensity) standby mode: approx. 1,2 μ A										
Supply		3x 1,5 V: Duracell Plus battery, DUR087033, AA (LR6)										
Ingress protection		IP 67										
Mounting position ²		any										
Weight		approx. 680 g										
A / D-converter resolution		16 bit										
Battery life		standard use: > 2.000 h					standby mode: at least 5 years					
Load cycles		> 100 x 10 ⁶										
CE-conformity		EMC directive: 2004/108/EC pressure equipment directive: 97/23/EC (Module A) ³ electromagnetic compatibility: according to EN 61326										
² Pressure transmitters are calibrated in a vertical position with the pressure connection down. If this position is changed on installation there can be slight deviations in the zero point for pressure ranges $P_N \leq 1$ bar.												
³ This directive is only valid for devices with maximum permissible overpressure > 200 bar.												

Dimensions (in mm)

standard

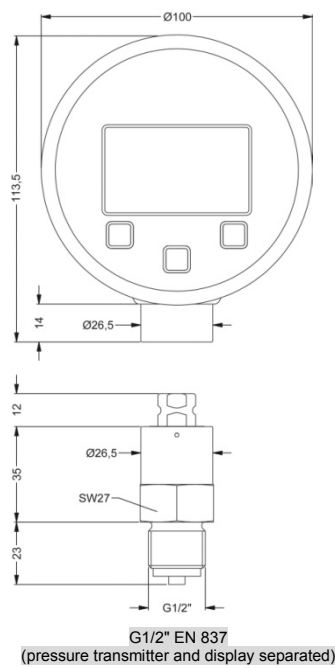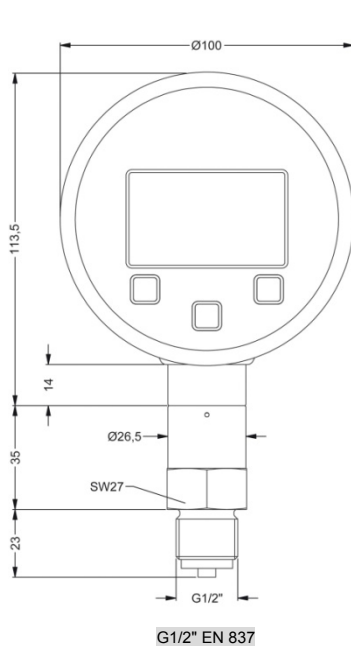

option



⇒ metrical threads and other variations on request

⁴ only possible for nominal pressure ranges $P_N \leq 40$ bar

⁵ different connection versions with optional adapters possible (see accessories)


Accessories are not in scope of supply and have to be ordered separately!

BD|LOG software

Optionally software BD|LOG and an interface cable can be ordered. The software is also available for download on our homepage.

Software:

- display of device information (serial number, pressure and temperature range,...)
- configuration area for all parameters
- download area for recorded data:
 - date
 - pressure measurement
 - temperature measurement
- actual value

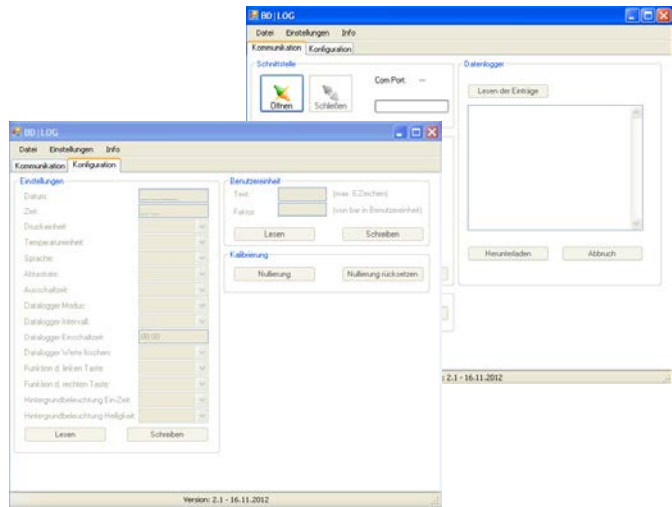








Interface cable with integrated USB converter
l: 1.7 m

Ordering number: ZUSBCD01

Adapter for pressure port G 1/4" EN 837 internal thread, welded

<p>G 1/4" EN 837</p> <p>Ordering number: Z5010203</p>		<p>Adapter for pressure sensor module with pressure port G 1/4" EN 837 internal thread, welded</p> <p>external thread: G 1/4" EN 837 external thread: G 1/4" EN 837</p>
<p>G 1/2" EN 837</p> <p>Ordering number: Z5010202</p>		<p>Adapter for pressure sensor module with pressure port G 1/4" EN 837 internal thread, welded</p> <p>external thread: G 1/4" EN 837 external thread: G 1/2" EN 837</p>
<p>1/4" NPT</p> <p>Ordering number: Z5010204</p>		<p>Adapter for pressure sensor module with pressure port G 1/4" EN 837 internal thread, welded</p> <p>external thread: G 1/4" EN 837 external thread: 1/4" NPT</p>
<p>1/2" NPT</p> <p>Ordering number: Z5010205</p>		<p>Adapter for pressure sensor module with pressure port G 1/4" EN 837 internal thread, welded</p> <p>external thread: G 1/4" EN 837 external thread: 1/2" NPT</p>


* others on request

<p>Hard-shell service case without accessories</p> <p>Service_Case_DM01</p>		<p>Hard shell case.</p> <p>Dimension in mm (L x W x H): 432 X 363 X 138</p>
<p>Protective cap</p> <p>Ordering number: Z1002648</p>		<p>Rubber protection</p>
<p>Additional batteries (only in combination with service case)</p>		<p>for IS-version use only</p> <ul style="list-style-type: none"> 3 x 1.5 V / AA Duracell Power Plus
<p>Seal set (only in combination with service case)</p>		<p>Flat seal copper for mechanical connections according to EN 837</p>
<p>PTFE seal tape Nr. 498.505 (only in combination with service case)</p>		<p>Seal tape for mechanical connections material: PTFE (Teflon) Temperature range: -200 ... 280 °C</p>
<p>Wrench (only in combination with service case)</p>		<p>Wrench SW 27</p>
<p>Calibration test pump KHP 35</p> <p>Ordering number: 1002637</p>		<p>The KHP 35 calibration test pump is used to generate pressure and vacuum for checking, adjusting and calibrating mechanical and electronic pressure measuring instruments by comparative measurements. These pressure tests may be carried out in laboratories, workshop or on site at the measuring point.</p> <p>pressure: 0 ... 35 bar vacuum: 0 ... -0,95 bar weight: ca. 510 g dimension: ca. 220 x 105 x 63 mm</p>
<p>Adapter for calibration test pump</p>		
<p>Test unit connection:</p> <p>Adapter to connect the test unit to the calibration test pump.</p>		<p>Adapter to connect the test unit to the calibration test pump.</p> <p>external thread: G 1/4" EN 837 to: internal thread: G 1/4" DIN 3852 (No. 5008909) or G 1/2" EN o. DIN (No. 5007896) or 1/4" NPT (No. 5007897) or 1/2" NPT (No. 5007898)</p> <p>others on request</p>
<p>Reference unit connection:</p> <p>Adapter to connect the digital gauge to the calibration test pump</p>		<p>Adapter to connect the pressure sensor module DM01 to the calibration test pump.</p> <p>external thread: G 1/2" EN 837 to: internal thread: G 1/4" DIN 3852 (No. 5012498) or G 1/2" DIN 3852 (No. 5012519) or 1/4" NPT (No. 5012499) or 1/2" NPT (No. 5012500)</p> <p>others on request</p>

This data sheet contains product specification, properties are not guaranteed. Subject to change without notice.

Ordering code DM01


DM01-



Digital pressure gauge DM01
with communication interface
IS with communication interface

2. position: transmitter for Precision Digital Pressure Gauge DM01

DM01



Pressure		M	0	K																
	gauge absolute	M	0	L																
Input [bar]																				
	0.10		1	0	0	0														
	0.16		1	6	0	0														
	0.25		2	5	0	0														
	0.40		4	0	0	0														
	0.60		6	0	0	0														
	1.0		1	0	0	1														
	1.6		1	6	0	1														
	2.5		2	5	0	1														
	4.0		4	0	0	1														
	6.0		6	0	0	1														
	10		1	0	0	2														
	16		1	6	0	2														
	25		2	5	0	2														
	40		4	0	0	2														
	60		6	0	0	2														
	100		1	0	0	3														
	160		1	6	0	3														
	250		2	5	0	3														
	400		4	0	0	3														
	-1 ... 0		X	1	0	2														
	customer		9	9	9	9														
version																				
	non IS					0														
	IS					E														
Accuracy																				
	standard for P _N ≥ 0.4 bar	0.05%					B	1												
	standard for P _N < 0.4 bar	0.125%					B	2												
	customer						9	9												
Mechanical connection																				
	G1/2" DIN 3852		1	0	0															
	G1/2" EN 837		2	0	0															
	G1/4" DIN 3852		3	0	0															
	G1/4" EN 837		4	0	0															
	G1/2" DIN 3852 with flush sensor ¹		F	0	0															
	G1/2" DIN 3852 open pressure port		H	0	0															
	1/2" NPT		N	0	0															
	1/4" NPT		N	4	0															
	G 1/4" EN837 internal thread, welded ^{1,2}		J	0	3															
	customer		9	9	9															
Seals																				
	FKM							1												
	customer							9												
Special version																				
	standard									0	0	0								
	customer									9	9	9								

¹ only possible for P_N ≤ 40 bar
² different connection versions with optional adapters possible (see accessories)

ordering example:
device DM01:
position 1: DM 01-A21
position 2: M0K-1001-B1-200-1-000
only display: position 1: DM01-A21
only transmitter: position 2: M0K-1001-B1-200-1-000



Visit the website: www.impress-sensors.co.uk

Company Reg. No.: 4346738, VAT No.:786 6596 54, Reg Address: Impress Sensors & Systems Ltd, Unit 6 Mercury House, Calleva Park, Aldermaston, Berkshire, RG7 8PN

Accessories DM01

Accessories	
USB converter (incl. software BD LOG)	ZUSBCD01
service case (without accessories)	Service_Case_DM01
Protective cap	Z1002648
Additional batteries (3 x 1,5 V / AA Duracell Power Plus) ³	1002798
Seal set ³	5008886
PTFE seal tape ³	1002724
wrench ³	1002722
Calibration test pump (KHP)	1002637
Adapter for DM01	
G1/4" EN 837 male - G1/4" EN 837 male	Z5010203
G1/4" EN 837 male - G1/2" EN 837 male	Z5010202
G1/4" EN 837 male - 1/4" NPT male	Z5010204
G1/4" EN 837 male - 1/2" NPT male	Z5010205
Adapter for KHP - test unit connection	
G1/4" EN 837 m - G1/4" DIN3852 fm	5008909
G1/4" EN 837 m - G1/2" EN 837/DIN3852 fm	5007896
G1/4" EN 837 m - 1/4" NPT fm	5007897
G1/4" EN 837 m - 1/2" NPT fm	5007898
Adapter for KHP - reference unit connection	
G1/2" EN 837 m - G1/4" DIN3852 fm	5012498
G1/2" EN 837 m - G1/2" DIN3852 fm	5012519
G1/2" EN 837 m - 1/4" NPT fm	5012499
G1/2" EN 837 m - 1/2" NPT fm	5012500

³ only in combination with service case

01.12.2013

This document contains product specification; properties are not guaranteed. Detailed information about options are defined in the datasheet. Subject to change without notice.



Visit the website: www.impress-sensors.co.uk

Company Reg. No.: 4346738, VAT No.:786 6596 54, Reg Address: Impress Sensors & Systems Ltd, Unit 6 Mercury House, Calleva Park, Aldermaston, Berkshire, RG7 8PN