


Accessories for SIMEX meters and data recorders


Mounting plates




SMP-99/94
to mount 96 x 48 mm
size unit in place
of 96 x 96 mm cut-out



SMP-147/94
to mount 96 x 48 mm
size unit in place
of 144 x 72 mm cut-out

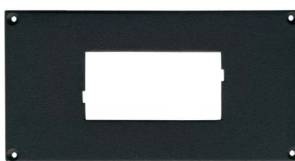


SMP-147/73
to mount 72 x 36 mm
size unit in place
of 144 x 72 mm cut-out

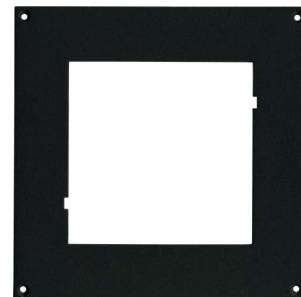

SMP-1414/99
to mount 96 x 96 mm
size unit in place
of 144 x 144 mm cut-out

DIN rail brackets



SRH-94
TS-35 DIN rail brackets
for 96 x 48 mm case



SRH-99
TS-35 DIN rail brackets
for 96 x 96 mm case



SRH-141
TS-35 DIN rail brackets
for 144 x 144 mm case


Security door with lock



STD-77
transparent IP 54 door
with lock for 72 x 72 mm case



STD-99
transparent IP 54 door
with lock for 96 x 96 mm case

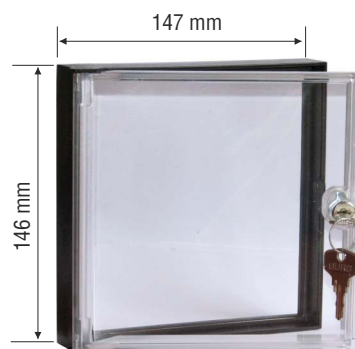

STD-141
transparent IP 54 door
with lock for 144 x 144 mm case

Transparent door with moulded frame acc. to DIN 43700, lockable with security key. Door and frame are made by injection moulding thus assuring an exact fit, an optimal choice of a material which is very strong and with no risk of corrosion; perfect seal-protective system IP 54 provided by all-round soft rubber sealing the moulding; door does not swing in or out sideways on opening; door-frame and frontframe can be exchanged.

Mounting brackets



SPH-45
1 ÷ 45 mm panel thickness
mounting brackets (2 pcs)

Remote controller



SIR-15


InfraRed remote controllers may be used as external programming keyboard for all SIMEX devices equipped with IR receivers and remote programming functions. Pressing of any local IR controller key, causes transmission of it's code to the device. Functions of particular keys depend on devices features.

Power supply voltage: 6V DC - 4 alkaline batteries type LR44
Operation range: from 0,5 to 5 m (depend on programmed device features)

USB memory

The mini USB memory stick is incredibly small and stylish flash drive offering up to 8GB data storage. Measuring merely 31,3 x 12,4 mm, the mini USB drive is ideal for transporting data and fits inside optional lockable door STD-99.

4 and 8 GB memory sticks available.

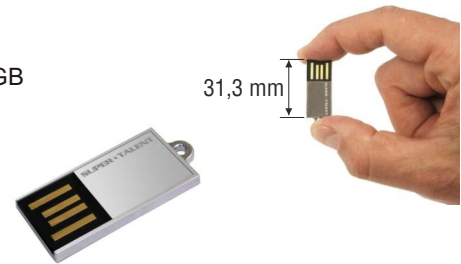

Portable case

Portable case P130

Portable transporting case, made by PELI, with input connectors for mounting CMC-99 or SRD-99 data recorders. It is useful in applications where there is no possibility of a typical controller / recorder safe installation. Case is very durable, has IP 65 protection class. On the side of the case there are multipin connectors for sensors and interfaces, according to customer needs.



SJP - measuring units

g	kg	t	N	kN	MN	%RH
Nm	kqm	obr/s	obr/min	rad/s	rad/min	g/m ³
Pa	hPa	kPa	MPa	kg/cm ²	PSI	mmHg
m/s	m/min	km/h	kg/s	kg/min	l/min	th
m ³ /s	m ³ /min	m ³ /h	l/s	l/min	l/h	%
°C	°F	°K	mA	A	kA	rad
mV	V	kV	mW	W	kW	MW
mVA	VA	kVA	MVA	Hz	kHz	MHz
min	m	km	m ³	l	Ah	kAh
Wh	kWh	MWh	mJ	J	kJ	MJ
GJ						

SJP - measuring units adhesive sheet
for **SWE-73** indicators